Telpo

Facial Biometric Thermometer

F10T

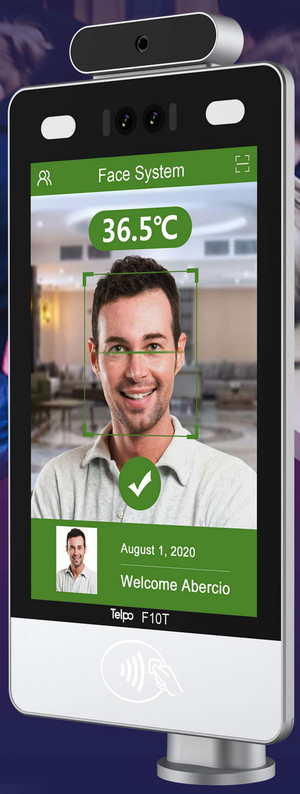

Larger and Clearer Display
10-inch, 800*1280

Infrared Thermography
Accuracy: ±0.3 °C / ±0.6 °F
Distance: 50 ~ 70cm
Support Celsuius and Fahrenheit

Intelligent Warning, Intimate Protection
High-temperature Voice Prompt
Forced Mask Wearing

Biometric Face Recognition
Speed < 1 s
Accuracy rate ⩾ 99.5%
Anti-cheating

Cloud-base Data Monitoring

Android | Telpo Cloud | Face Detection | Mask Detection | Temperature Measurement | Voice Prompt | NFC

F10T

Facial Biometric Thermometer

Specification

OS	Android 9.0 or above
Processor	Octa-Core 1.8GHz
Memory	2GB DDR, 16GB eMMC 3GB DDR, 32GB eMMC (Optional)
Display	10-inch, 800*1280
Keys	1 Reset Key
Front Camera	Dual-lens Camera (RGB+IR), 2MP+1.3MP Single-lens Camera (RGB), 2MP (Optional) 3D Depth Sensing Camera (Optional)
Fill Light/Indicator Light	White/Green/Red/Blue
Contactless Card Reader	ISO14443 Type A/B, Mifare HID Cards(Optional)
Temperature Measurement(Optional)	Resolution : 32*32 Distance : 50 ~ 70cm Accuracy : ± 0.3 °C
QR Code Scanner (Optional)	Support
Communications	Ethernet/WiFi/Bluetooth
Peripheral Ports	1 DC Port, 1 RJ45, 1 Micro USB, 1 Wiegand Input, 1 Wiegand Output, 1 RS485, 1 RS232, 1 Relay, 1 USB Type A
Audio	Digital Audio Speaker, Microphone
Power Supply	12V/2A
Bracket (Optional)	Wall Mount Bracket, Turnstile Mount Bracket

Note: Reserve the right to change the parameters without prior notice.

Accessories（Optional）

Dimensions(mm)

Application

Airport

Bank

Office


Hotel

Community

Telepower Communication Co.,Ltd.

E-mail: business@telpo.com Skype: telpo_business

Web: www.telpo.com.cn

Add: Foshan City, Guangdong Province, China

© Copyright 2021 Telepower Communication Co., Ltd. All Rights Reserved.