

F67

Smart SIP Door Phone

Entrance device for multifamily buildings / multi-office buildings / other scenarios



Qualcomm Solution

Stronger Performance with Qualcomm solution, Android 8.1 OS, OCTA Core, 2GB RAM, 16GB Flash



Telpo Intercom APP

Integrated with Telpo APP, support to video/audio call, one-key to service center, remote door control, etc.



Advanced Display

7-inch, IPS display
1024x600 resolution
Multi touch supported



Easy to integrate

We provide full SDK of device hardware, welcome to be integrated by 3rd-party software



Rich Interfaces

3x Relays, 1x RS485,
1x Wiegand, 1x Micro USB
1x RJ45 Ethernet,
POE optional



SIP Protocol

Support standard SIP 2.0,
flexible in connection,
easier to connect with
3rd-party server/platform



Flexible Installation

Support both wall-mounted and flush-mounted, with its bracket and mounted box




Great Ingress Protection

Support IP65, Water by a nozzle (6.3 mm (0.25 in) against enclosure from any direction have no harmful effects.

Hardware Details



Flush-mounted Box

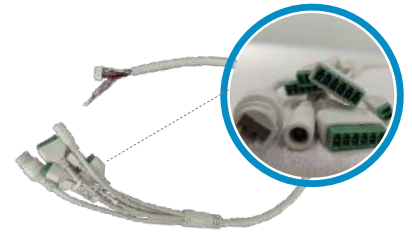

Connector Cable

Packing List:

1. F67 main unit
2. Flush-mounted box
3. Connector cable
4. Power adaptor
5. Some screws

Software Features

• Video Intercom Software in Terminals

- ✓ Video/Audio SIP call between door phones and indoor units
- ✓ One-key to Call Center, one-key to SOS
- ✓ Open door by indoor unit, password, IC card
- ✓ Get live view from door phone camera
- ✓ Contact list to easy call out
- ✓ SDK/API to integrate with 3rd-party software



• Main Features in Server

- ✓ SIP protocol to easily connect between server and terminals
- ✓ Group management, to set buildings into different groups
- ✓ SIP number configuration and management
- ✓ Password management
- ✓ Card configuration

Specification

| Items | F67 |
|-------------------------|---|
| OS | Android 8.1 |
| Processor | Octa-Core 2.0GHz |
| Memory | 2GB DDR, 16GB eMMC |
| Display | 7-inch, 600*1024 |
| Camera | Dual-lens Camera (RGB+IR), 2MP+2MP |
| Fill Light | White LED |
| Intercom | Support |
| Contactless Card Reader | ISO14443 Type A, Mifare (Optional) 125KHz ID Card (Optional) |
| Communications | Ethernet POE (Optional) |
| Peripheral Ports | 1 DC, 1 Micro USB, 1 RJ45, 1 Wiegand, 1 RS485(half-duplex), 3 Relay |
| Audio | Digital Audio Speaker, Microphone |
| Power Supply | 12V/2A |
| Bracket | Wall Mount Bracket |
| Dimensions (mm) | 307(L)*130(W)*30(H) |
| Environmental | Operating temperature: -20°C~ 55°CStorage temperature: -25°C~ 60°C |
| IP Protection | IP65 |

Telpo

VoIP | Android | Intercom

Telepower Communication Co., LTD

Add: Foshan City, Guangdong Province, China

Tel: 0086-0757-86227898

Email: business@telpo.com

Web: www.telpo.com.cn

