



R6

Food Delivery Robot

Makes Serving More Efficient



Front



Side



4-layer open tray



Hatch(Optional)



APPLICATION


- Restaurant
- Hotel
- Office building
- Coffee shop
- Shopping Mall

R6


Food Delivery Robot



Precise positioning

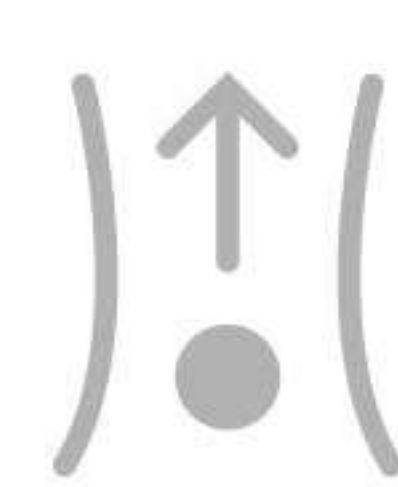

Narrow passage

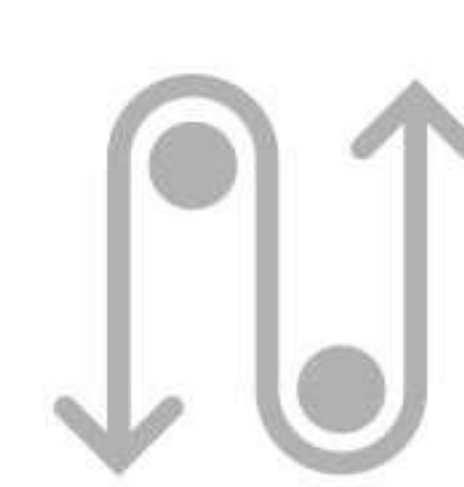

Intelligent obstacle avoidance



10.1-inch Touchscreen



Autonomous returning recharge



4-layer open tray



Professional-grade shock absorption



Multiple delivery tasks

SPECIFICATION



Tray Dimension(mm)
443(L)*305(W)*265(H)



Machine Dimension(mm)
508(L)*508(W)*1350(H)



Weight(kg)
65kg



Maximum Travel Speed
0.7~1m/s



Loads
15Kg for the each layer



Maximum Gradability
≤ 5°



Communications
WIFI/3G/4G



Environmental
Indoor environment, flat and smooth ground



Battery
24V/32Ah



Charging Mode
Support automatic/manual charging, input power

Note: All specifications are subject to change without prior notice.

DETAILS



Telepower Communication Co.,Ltd.

www.telpo.com.cn

+86 757 86337898-834

business@telpo.com

Foshan City, Guangdong Province, China

©Copyright 2022 Telepower Communication Co., Ltd. All Rights Reserved.

